



Preventive Maintenance Kit

Applicable Models: Simplicity™ Bubbler®




PM Frequency: every 9 months or sooner if needed

Parts Included:

Bowl Gasket(s)
Impeller(s)
Plunger Seal(s)
Filter

Description and Instructions:

1. Verify unit clearance per diagram.
2. Replace air filter in underside of the unit base.
3. Replace all gaskets, seals, and impellers listed.

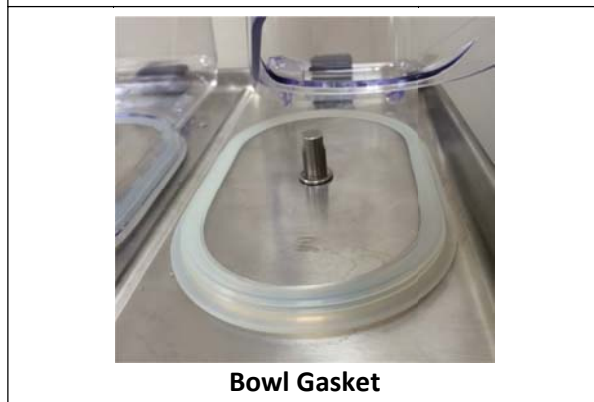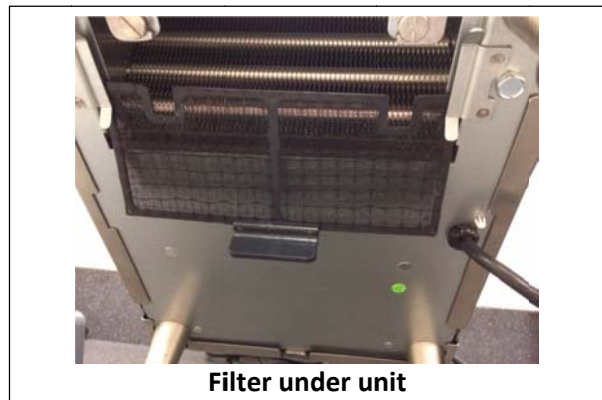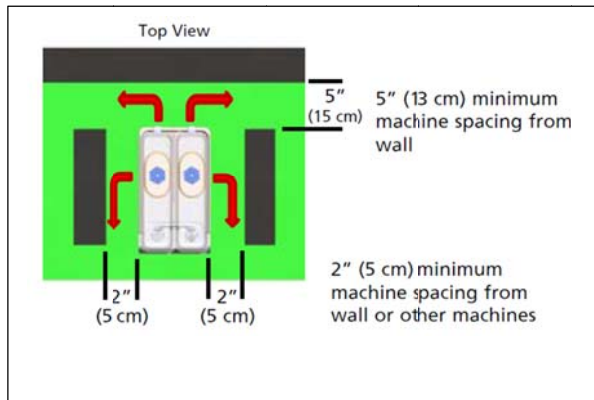

Operator Manuals, including use and care instructions as well as product video tutorials, can be found on our website, www.gmcw.com. Call 1-800-695-4500 for Technical Support.